


# Modular Building systems

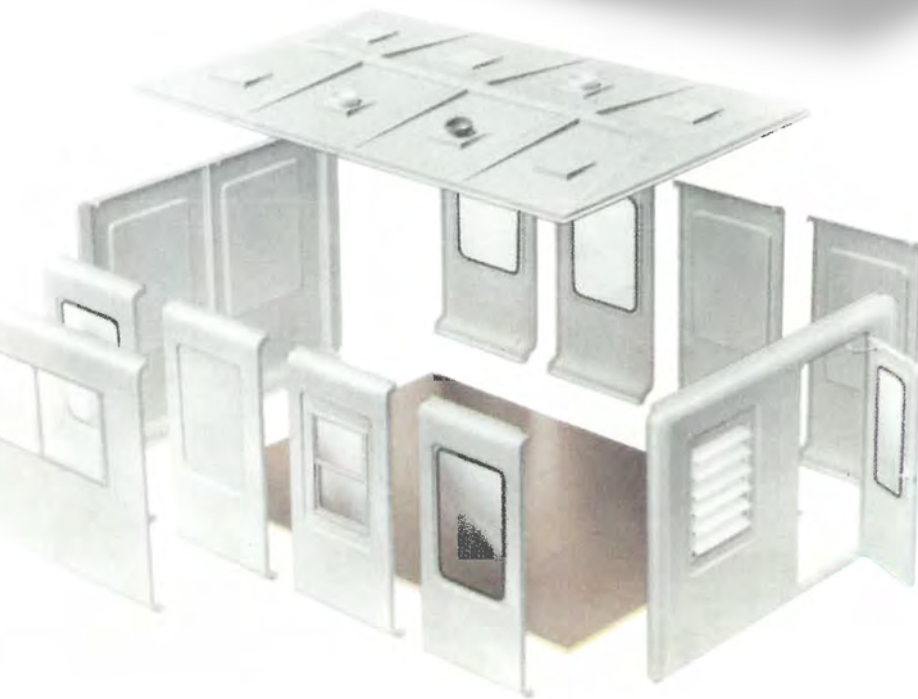


Manufactured from maintenance-free GRP to withstand all weather conditions, the system satisfies a diverse range of accommodation requirements including factory and warehouse offices, labour accommodation, kiosks, security posts, control booths and more.

Lightweight modular panels allow the flexibility necessary to facilitate quick on-site assembly or fully assembled delivery within two to four weeks.

Rigorous quality control procedures, professional design and production techniques, ensure superior products and innovative applications at an economical price.

# Panel Options - Double Skin & Insulation

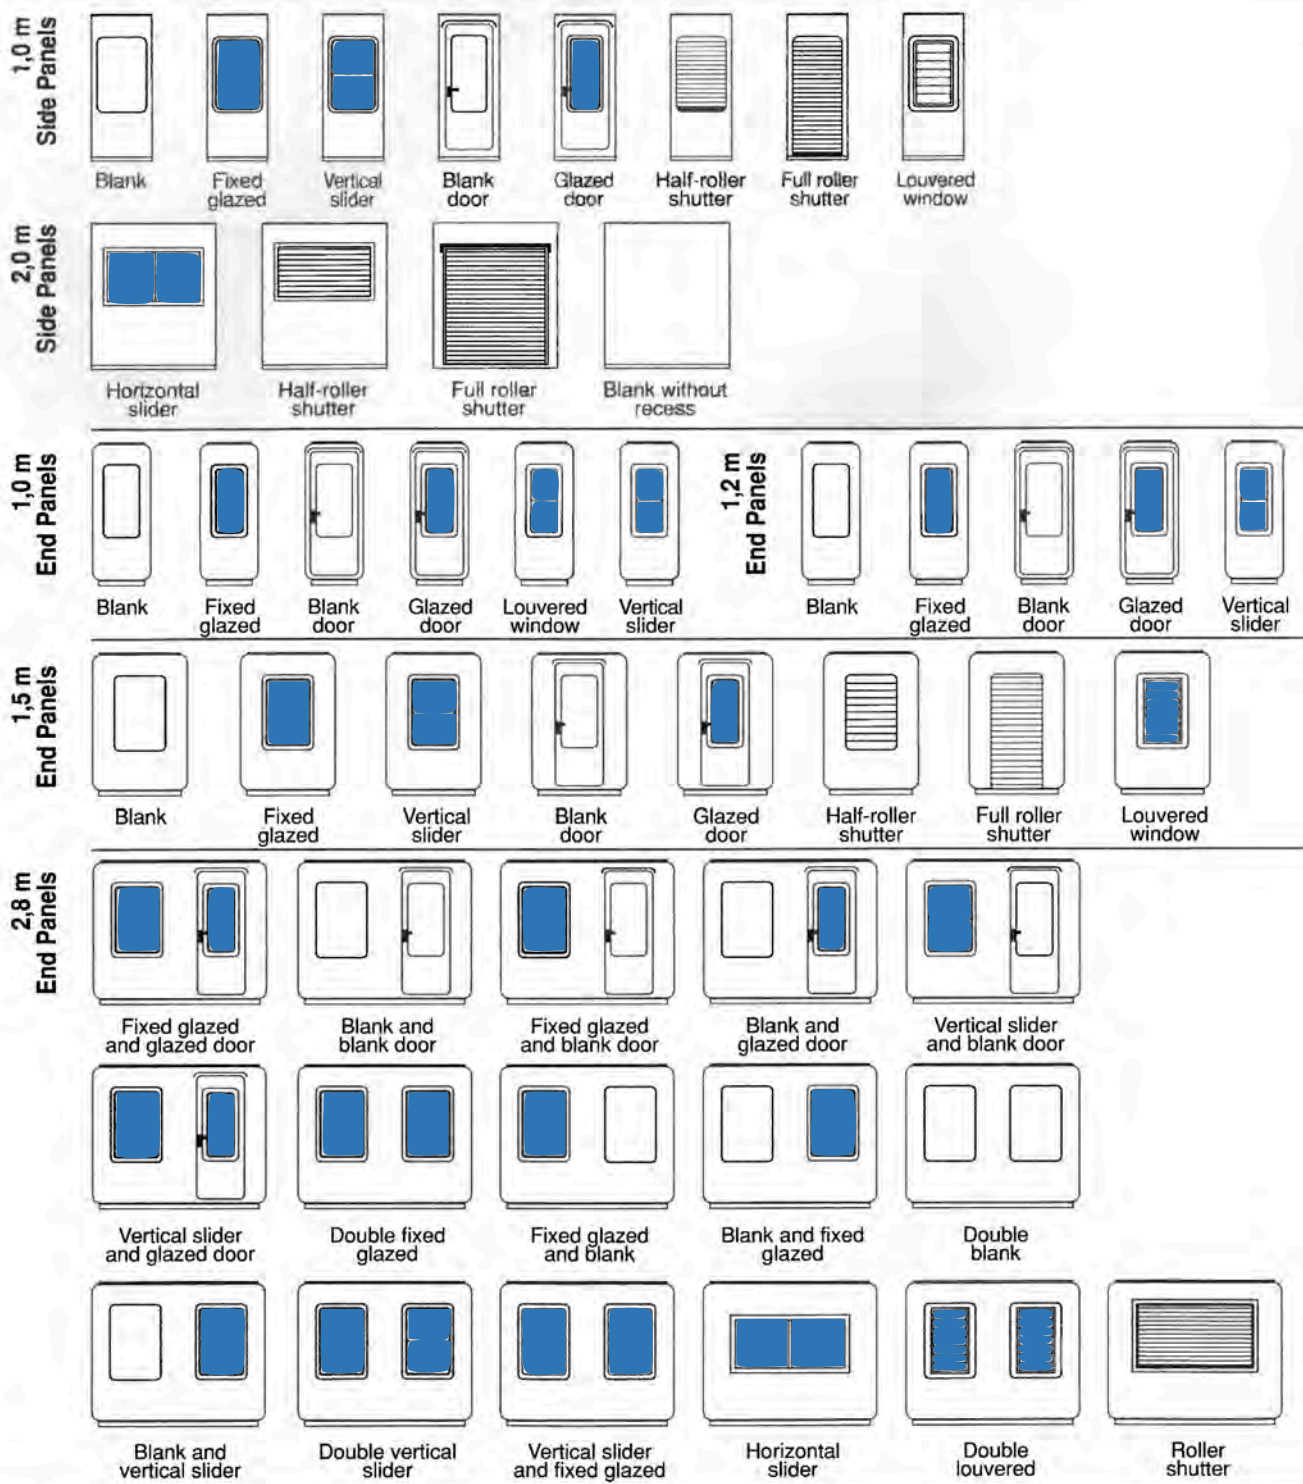

## Technical Data

PANEL MAKE UP	
Isophthalic polyester pigmented resin (gelcoat)	External Finish
Thixotropic polyester resin and glass reinforcement	Material
20mm polyurethane foam	Rigidity and Insulation
White with fleck	Internal Finish
GLASING	
4mm toughened glass	Fixed Window, Door Window, Sliding Windows
Aluminium frames	Sliding Windows
Rubber gasket	Fixed Windows

COVER STRIPS	
Cover strips	On all flanges

INSULATION	
'U' Value (standard panel)	2,0446 x 10 <sup>4</sup>



# AQUATHANE

EMAIL: [info@aquathane.co.za](mailto:info@aquathane.co.za)

OFFICE PHONE: +27 12 756 4350 CELL: 082 803 8410

ADDRESS: Unit 45, Tannery Industrial Park, 309 Derdepoort Rd, Silverton